


Model:

**OXLUS 10**  
**OXLUS 20**

## Pipe Inspection System Portable Push-rod Camera

- DN50 to DN125 pipes, 20 m / 30 m / 40m cable
- All-in-one design: easy to carry around
- Rich choices of camera heads

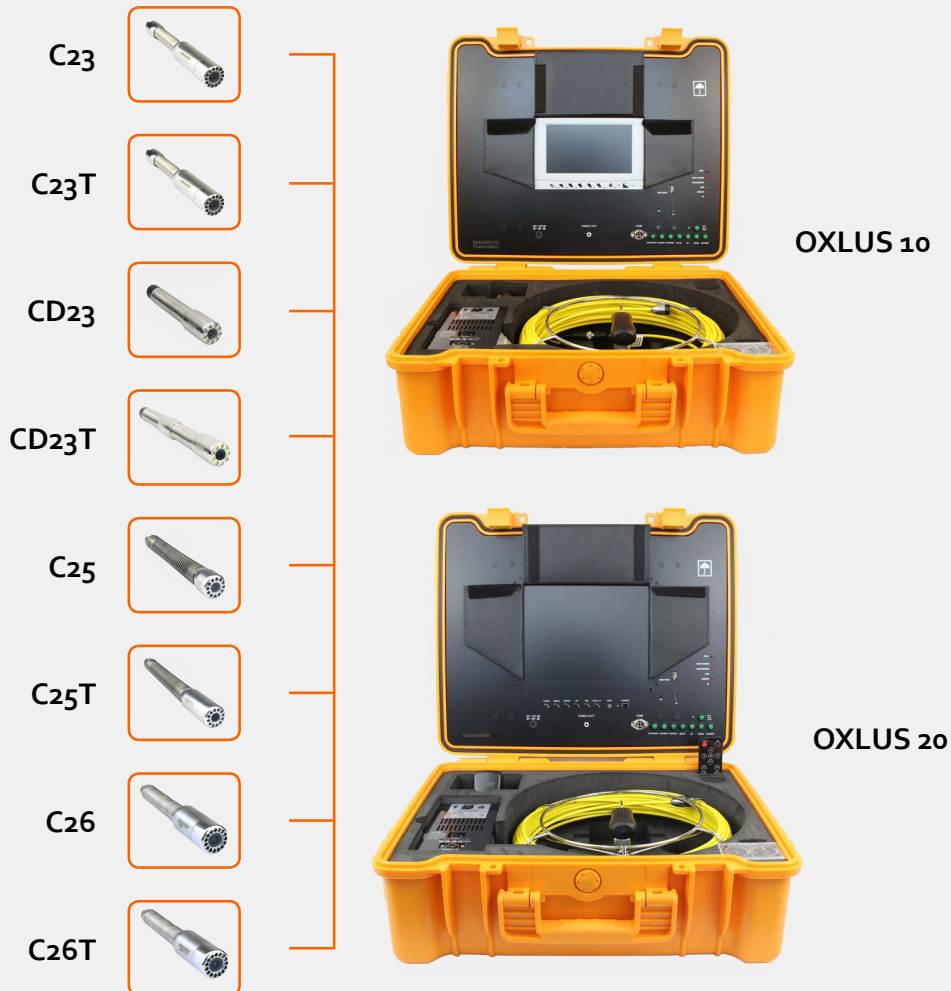

### Accessories

1 × DVR remote control, 1 × charger/AC adaptor, 1 × connecting cable, 1 × centralizer (except for the camera head C25), 1 × camera head protection in EVA, 1 × built-in Li-Ion battery, 1 × notice

### Parameters



**OXLUS 10 -  
CST7S**

Screen: 7" TFT, resolution 800 × 480 PX

Autonomy: ≥ 4 h

Power supply: 220 VAC / Li-Ion battery

Photo/video formats: JPEG / AVI

Audio recording

Ports: 1 × USB, 1 × SD, 1 × video input

Case: all-in-one, ABS, splash-proof

Weight & dimensions: 7,5 kg, 51 × 43 × 18 cm



**OXLUS 20 -  
CST10S**

Screen: 10" TFT, resolution 800 × 600 PX

Autonomy: ≥ 4 h

Power supply: 220 VAC / Li-Ion battery

Photo/video formats: JPEG / AVI

Audio recording

Ports: 1 × USB, 1 × SD, 1 × video input, 1 × video output

Case: all-in-one, ABS, splash-proof



**Cable Reel  
CR31**

Cable material: fibre glass

Diameter & length:  $\Phi$  5.2 mm & 20 m / 30 m / 40 m

Meter counting: in option

Power supply: by the control station

Protection rating: splash-proof

Operational temperature: -28°C to 50°C

Dimensions: 32 × 32 × 11 cm

## Parameters - Camera Heads

Model	Φ×L (mm)	Diameter range (mm)	Passage of elbows (mm)	512 Hz transmitter	Self-leveling	Materials	Focal length	Resolution	Lighting
C23	Φ23 × 75	DN50-DN125	≥ 65	No	No	Housing in stainless steel; lens in sapphire crystal	10 - 20 cm, fixed focal length	0.4 MP	12 LEDs
C23T	Φ23 × 75	DN50-DN125	≥ 65	Yes	No			0.4 MP	12 LEDs
CD23	Φ23 × 42	DN50-DN125	≥ 40	No	Yes			0.5 MP	9 strong LEDs
CD23T	Φ23 × 42	DN50-DN125	≥ 40	Yes	Yes			0.5 MP	9 strong LEDs
C25	Φ25 × 27	DN50-DN125	≥ 35	No	No			0.4 MP	12 LEDs
C25T	Φ25 × 62	DN50-DN125	≥ 65	Yes	No			0.4 MP	12 LEDs
C26	Φ26 × 64	DN50-DN125	≥ 65	No	Yes			0.5 M	15 LEDs
C26T	Φ26 × 64	DN50-DN125	≥ 65	Yes	Yes			0.5 M	15 LEDs

## Order codes

Control Station	
Code	Description
CST7S	Control station OXLUS 10
CST10S	Control station OXLUS 20
Camera Head	
Code	Description
- C23	Φ23 mm camera head
- C23T	Φ23 mm camera head, 512 Hz transmitter
...	
- C26T	Φ26 mm camera head, 512 Hz transmitter, self-leveling function
Cable Reel	
Code	Description
- CR31-20M	Portable reel, 20 m cable
...	
- CR31-40MC	Portable reel, 40 m cable, meter counting



Standard Products	
Codes	Description
CST7S - C23 - CR31-20M	Control station OXLUS 10 + Camera head C23 + Portable reel of 20 m cable
CST10S - C25T - CR31-40MC	Control station OXLUS 20 + Camera head C25T + Portable reel of 40 m cable, meter counting